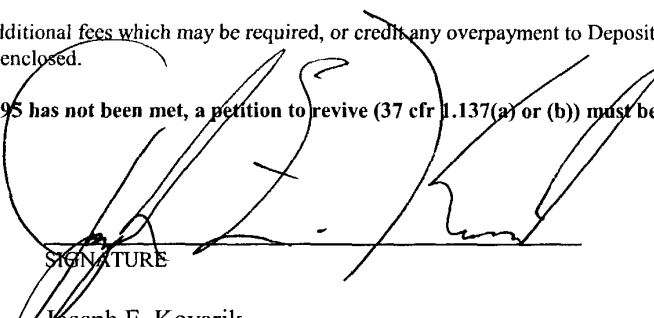


JOHNSON & JOHNSON Rec'd PCT/PTO 28 MAR 2002

FORM PTO-1390 (REV 10-95)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEYS DOCKET NO.	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				1037BAS-1	
				U.S. APPLICATION NO. (If known, see 35 CFR 1.5) 10/089398	
INTERNATIONAL APPLICATION NO. PCT/AU00/01204		INTERNATIONAL FILING DATE 02 October 2000		PRIORITY DATE CLAIMED 30 September 1999	
TITLE OF INVENTION "SYRINGE DISPOSAL DEVICE"					
APPLICANT(S) FOR DO/EO/US HERBERT, John					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)). <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 					
Items 11. To 16. below concern documents or information included:					
<ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37n CFR 1.97 and 1.98. 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.23 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input type="checkbox"/> Other items or information: 					
<p>"EXPRESS MAIL" MAILING LABEL NUMBER: EV068097206US DATE OF DEPOSIT: March 28, 2002</p> <p>I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING DEPOSITED WITH THE UNITED STATES POSTAL SERVICE "EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS ADDRESSED TO THE ASSISTANT COMMISSIONER FOR PATENTS, BOX PCT, WASHINGTON, D.C. 20231.</p> <p>TYPED OR PRINTED NAME: <u>JANICE MESSER</u></p> <p>SIGNATURE: <u><i>Janice Messer</i></u></p>					

IC10 PCT/PTO 28 MAR 2002

U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/089398		INTERNATIONAL APPLICATION NO. PCT/AU00/01204		ATTORNEY DOCKET NUMBER 1037BAS-1	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):					
Search Report has been prepared by the EPO or JPO				\$860.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482)				\$690.00	
No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))				\$710.00	
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid USPTO				\$1,000.00	
International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)				\$100.00	
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 1,000.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	8 - 20 =	0	x \$18.00	\$ 0.00	
Independent Claims	1 - 3 =	0	x \$80.00	\$ 0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$ 1,000.00	
[] Applicant claims small entity status under 37 CFR 1.27.				\$	
SUBTOTAL =				\$	
Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) \$40.00 per property				\$	
TOTAL FEES ENCLOSED =				\$ 1,000.00	
				Amount to be: refunded	\$
				charged	\$
a. <input checked="" type="checkbox"/> A check in the amount of \$ <u>1,000.00</u> to cover the above fees is enclosed.					
b. [] Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-1970. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 cfr 1.494 or 1.495 has not been met, a petition to revive (37 cfr 1.137(a) or (b)) must be filed and granted to restore the application pending status.					
SEND ALL CORRESPONDENCE TO:					
SHERIDAN ROSS P.C. 1560 Broadway, Suite 1200 Denver, Colorado 80202-5141 Telephone: (303) 863-9700 Facsimile: (303) 863-0223					
 SIGNATURE Joseph E. Kovarik Registration No. 33,005					

10/089398

IC10 Rec'd PCT/PTD 2 8 MAR 2002

PATENT APPLICATIONS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the Application of:

HERBERT, John

Int'l. Serial No.: PCT/AU00/01204

Int'l. Filing Date: 02 October 2000

Priority Date: 30 September 1999

For: "SYRINGE DISPOSAL DEVICE")

Atty. File No.: 1037BAS-1

PRELIMINARY AMENDMENT

"EXPRESS MAIL" MAILING LABEL NUMBER: EV068097206US
DATE OF DEPOSIT: 3-28-02

I HEREBY CERTIFY THAT THIS PAPER OR FEE IS BEING
DEPOSITED WITH THE UNITED STATES POSTAL SERVICE
"EXPRESS MAIL POST OFFICE TO ADDRESSEE" SERVICE
UNDER 37 CFR 1.10 ON THE DATE INDICATED ABOVE AND IS
ADDRESSED TO THE ASSISTANT COMMISSIONER FOR
PATENTS, BOX PCT, WASHINGTON, D.C. 20231.

TYPED OR PRINTED NAME: JANICE MESSER

SIGNATURE: *Janice Messer*

Box PCT

Assistant Commissioner for Patents

Washington, D.C. 20231

Dear Sir:

Prior to the initial review of the above-identified patent application by the Examiner, please enter the following Preliminary Amendment. Fees for this Preliminary Amendment are calculated and included with the Transmittal Letter accompanying this Amendment. Please charge any underpayment or debit any overpayment to Deposit Account 19-1970.

Please amend the above-identified patent application as follows:

IN THE CLAIMS:

Please amend Claims 1, 3-7 as follows:

1. A syringe disposal device suitable for disposal of a single syringe having a needle, a barrel, a plunger and, on the barrel or plunger, a transversely extending portion, the disposal device including;

a needle encapsulating portion;

a syringe barrel encapsulating portion; and

Application No.: PCT/AU00/01204

a syringe retention portion, wherein said syringe retention portion, having greater external dimension along substantially its whole length than an outer diameter of the syringe barrel encapsulating portion and the needle encapsulating portion, has an open end for insertion of a syringe therein and an opposed end communicating said retention portion with said syringe barrel encapsulating portion, engagement means being provided at or proximate, said opposed end of said syringe retention portion for retaining a syringe within the disposal device after passage of said transversely extending portion past said engagement means by interference fit

3. The syringe disposal device according to claim 1 including a morse taper at the transition between said syringe barrel encapsulating portion and said needle encapsulating portion.

4. The syringe disposal device of claim 1 wherein said engagement means is a lug engagement means for engaging said transversely extending portion after passage thereof past said lug engagement means.

5. The syringe disposal device of claim 1 wherein said engagement means is an annular engaging face provided at said opposed end of said syringe retention portion.

6. The syringe disposal device of claim 1 wherein said device is of tapered form.

7. A kit including a holder for retaining a syringe disposal device as claimed in claim 1 and said syringe disposal device.

REMARKS/ARGUMENTS

The above amendments are being submitted in connection with the national stage filing of the present Application. The amendments eliminate the multiple dependent claims from the Application.

Application No.: PCT/AU00/01204

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned **"Version With Markings to Show Changes Made."**

Respectfully submitted,

SHERIDAN ROSS P.C.

By: 

Joseph E. Kovarik

Registration No. 33,005

1560 Broadway, Suite 1200

Denver, Colorado 80202-5141

(303) 863-9700

Date: 3/28/02

VERSION WITH MARKINGS TO SHOW CHANGES MADE

In the Claims:

Claims 1 and 3-7 have been amended as follows:

1. A syringe disposal device suitable for disposal of a single syringe having a needle, a barrel, a plunger and, on the barrel or plunger, a transversely extending portion, the disposal device including;

[a.)) a needle encapsulating portion;

[b.)) a syringe barrel encapsulating portion; and

[c.)) a syringe retention portion, wherein said syringe retention portion, having greater external dimension along substantially its whole length than an outer diameter of the syringe barrel encapsulating portion and the needle encapsulating portion, has an open end for insertion of a syringe therein and an opposed end communicating said retention portion with said syringe barrel encapsulating portion, engagement means being provided at or proximate, said opposed end of said syringe retention portion for retaining a syringe within the disposal device after passage of said transversely extending portion past said engagement means by interference fit

3. The syringe disposal device according to claim 1 [or 2] including a morse taper at the transition between said syringe barrel encapsulating portion and said needle encapsulating portion.

4. The syringe disposal device of [any one of the preceding claims] claim 1 wherein said engagement means is a lug engagement means for engaging said transversely extending portion after passage thereof past said lug engagement means.

5. The syringe disposal device of [any one of claims 1 to 3] claim 1 wherein said engagement means is an annular engaging face provided at said opposed end of said syringe retention portion.

6. The syringe disposal device of [any one of claims 1 to 5 in which a body of] claim 1 wherein said device is of tapered form.

7. A kit including a holder for retaining a syringe disposal device as claimed in [any one of the preceding claims;] claim 1 and said syringe disposal device.

SYRINGE DISPOSAL DEVICE**Field Of Invention**

This invention relates to a syringe disposal device and, in particular, to a device suitable for encapsulation and disposal of a single syringe.

5 Prior Art

The hazards of used needles are now well recognised. It is well known that a number of diseases may be transmitted by reuse of syringes. For example, the transmission of AIDS and Hepatitis viruses such as Hepatitis C through reuse of needles is now well documented.

10 Transmission of disease is not only possible through reuse of needles but indeed may be caused by so called needle stick injury in which a needle inadvertently punctures the skin of a person allowing transmission of a virus to that person. A number of proposals for dealing with such hazards have been documented in the patent literature.

15 For example, French Patent No. 2650511 describes a syringe protection device which is intended to facilitate preparation of injections. The device is also intended to eliminate the risk of pricking injuries as well as the possible recovery of the used syringes.

Most such proposals are predicated on use in a therapeutic environment in
20 which many needles are used on a daily basis and a centralised disposal unit may readily be used for the purpose of needle disposal. In such environments, the risk of reuse is relatively small and the prime concern is to ensure that disease transmission through needle stick injury does not occur. A number of technologies for needle destruction and/or containment are known. Grinding,
25 melt-fusion and other technologies are available which confine used needles in a safe environment subsequent to other disposal steps.

Real hazards remain, however in the non-therapeutic environment where availability of a centralised needle disposal system is problematic. Even if such disposal facility is available there remains the problem that accidents may occur
30 while conveying a used needle to the disposal facility. It is understood that while there has been a dramatic increase in the number of syringes distributed and collected from disposal units with different sharps containers, surveys have

indicated that a major problem with needle syringe exchange programs is availability of disposal units on both a locality and time frame basis.

Therefore, it is in the interest of public health for more needle disposal options to be available to drug users to minimize hazards to the general community through disease transmission as above described. Such disposal options should be suitable for safe disposal of single syringes after a single use. In that way, the disposal system interfaces well with the needle exchange program.

Summary Of The Invention

10 It is the object of the current invention to provide a syringe disposal device which addresses the problems above described at reasonable cost and accessibility to the drug user.

With this object in view, the present invention provides a syringe disposal device suitable for disposal of a single syringe having a needle, a barrel, a plunger and, on the barrel or plunger, a transversely extending portion, the disposal device including;

- a.) a needle encapsulating portion;
- b.) a syringe barrel encapsulating portion; and
- c.) a syringe retention portion,

20 wherein said syringe retention portion has an open end for insertion of a syringe therein and an opposed end communicating said retention portion with said syringe barrel encapsulating portion, engagement means being provided at or proximate, said opposed end of said syringe retention portion for retaining a syringe within the disposal device after passage of said transversely extending portion past said engagement means by an interference fit.

The disposal device may advantageously have a body of tapered form. In particular, the syringe retention portion may advantageously be tapered. The syringe retention portion may have greater external dimension along substantially its whole length than an outer diameter of the syringe barrel encapsulating portion and the needle encapsulating portion.

30 Engagement means additional to those provided in the syringe retention portion may be provided as described, for example, below.

The transversely extending portion may be constituted by a syringe barrel outer surface or a surface of a transversely extending portion of a flange of the plunger or syringe barrel or both. It will ordinarily be constituted by the broadest portion of the disposed syringe thus bearing on the engaging means to prevent
5 syringe retraction by exertion of reasonable force after use.

A number of lug engagement means may be provided for engaging the transversely extending bearing portion. Alternatively, an engaging face of generally annular shape may be provided at the opposed end of the syringe retention portion. Interference fitting or press fitting past the engaging means
10 provides greater assurance that the syringe will be retained within the disposal device following use. To this end, it is preferred that a rigid material is used for fabrication of the device. A suitable rigid polymer is preferably to be used for this purpose, noting that such polymer should have nature requisite to, and fabricated for preventing needle puncture.

15 The disposal device may incorporate a morse taper, particularly at the transition between the syringe barrel encapsulating portion and the needle encapsulating portion. This accommodates the needle carrier, hub, needle and/or upper end of the syringe barrel in a neat engaging fit similar to that employed for fitting of sockets and the like in tool kits.

20 The disposal device may be designed such that at least one of the needle encapsulating portion and the syringe barrel encapsulating portion have a multi-stepped configuration for increasing the probability of the needle impacting the inner surface during retaining of a syringe for disposal thereof. A disposal device of this design is described in the Applicant's co-pending Australian Provisional
25 Patent Application No. PQ6999, "Syringe Retaining Device", filed 18 April 2000, the contents of which are hereby incorporated herein by reference.

The syringe disposal unit is suitable for disposal of a syringe following an injection event, especially in a non-therapeutic environment.

In another aspect of the invention, the syringe disposal device may be
30 retained in a holder which includes a syringe, and may include accessories for use in an injection. Such accessories may include distilled water or other solvent for an injectable to be used in the injection and other equipment, such as spoons, for injection preparation. A spoon or receptacle of preferred type may have a wall

defining a vessel in which an injectable solution may be prepared, there being provided in the wall a depression forming a sump to which injectable solution drains during drawing up of the injectable solution into an injection device. Such a receptacle is described in Australian Provisional Patent Application No. 5 PQ7000, "Intra-Venous Injection Preparation Device and Kit", filed 18 April 2000, the contents of which are hereby incorporated by reference.

Such a holder should likewise be fabricated from a low cost polymeric or metallic material. If the syringe is provided with the holder, the syringe may be located within the disposal device but in a non-engaged position such that 10 withdrawal of the syringe from the device is readily possible.

Such kits may be produced to have different combinations of contents and may be colour coded to indicate the nature of their contents such that users may readily be informed of suitable packaged holders for their use.

Such kits would be readily available from pharmacies in a package that 15 facilitates anonymity of the transaction. This will greatly reduce discomfort to both the pharmacist and the intravenous drug user in a transaction carried out in a busy pharmacy. Reduction in barriers such as this at the pharmacy-intravenous drug user level is important to adoption of safe disposal devices of the kind offered by this invention. In so doing, ready availability of such disposal devices 20 and kits may be assured. User of the disposal device and the kit generally will also reduce the risk of cross-infection between used and clean syringes.

Brief Description Of The Drawings

The invention will be more fully understood from the following description made with reference to the following drawings in which:

25 Figure 1 shows a side section of a syringe disposal device in accordance with the invention having a syringe with the syringe in a non-engaged position;

Figure 2 shows a side section of a syringe disposal device in accordance with the invention having a syringe in an engaged position;

Figure 3 shows a detail section showing retention of a syringe flange within 30 the syringe disposal device of the present invention;

Figure 4 shows a part section view showing a portion of the syringe barrel encapsulating portion and the needle encapsulating portion of a syringe disposal device in accordance with the present invention;

Figure 5 shows the section of Figure 3 with a syringe needle cover cap in place on the syringe maintaining it in a non-engaged position;

Figure 6 shows a capped syringe preventing it being engaged in the syringe disposal device in accordance with a further embodiment of the present invention; and

Figure 7 shows a holder for the syringe disposal device in accordance with a further aspect of the present invention.

Detailed Description Of Preferred Embodiments

Referring to Figure 1 of the drawings, there is shown the syringe disposal device 10 of the present invention fabricated from a rigid polymeric material. The syringe disposal device 10 includes a needle encapsulating portion 12, a syringe barrel encapsulating portion 14 and a syringe retention portion 16. The plunger retention portion 16 has a tapered internal wall 17 and it will be observed that said accommodating portion 16 has greater diameter along substantially its whole length than an outer diameter of the syringe barrel encapsulating portion 14 and needle encapsulating portion 12.

The disposal device 10 is suitable for disposing of any kind of syringe. The syringe 30 shown in Figure 1 and the drawings generally is of a conventional type having a needle 33, a hub 34, a needle carrier 35, a barrel 38 and a plunger 39. The barrel 38 has transversely extending flange portions 38a which, on engagement with the engaging means 20, retain the syringe 30 within disposal device 10.

The syringe retention portion 16 has an open end 18 to allow syringe 30 to be placed by pressing into the device 10. Particularly, it is of sufficient lateral dimension to amply accommodate barrel 38 flanges 38a at open end 11, thus assisting with location. At another opposed end 19, retention portion 16 communicates with the syringe barrel encapsulating portion 14. The opposed end 19, of circular or oval shape, is provided with engagement means 20 retaining a syringe 30 within the disposal device 10 after passage of a flange portions 38a past engaging means 20 by interference fitting.

In Figures 1 and 5, the syringe 30 is shown in a non-retained position as may be suitable prior to an injection and readily accommodated by the inventive device. It will be noted, in this case, that location of cap 40 at the end of plunger

39 remote from needle encapsulating portion 12 prevents insertion of the syringe past the engaging means 20 because the cap 40 is of greater width than a lateral dimension of opposed end 19. The syringe 30 can therefore not be retained within the disposal device 10 until cap 40 is removed. Figure 6 shows another example of a cap 40 fitted at the needle end of syringe 30 used to prevent syringe 30 being placed into engagement with disposed device 10 until necessary. Here, cap 40 has greater width than an opening 12a of needle encapsulating portion 12. The syringe 30 is thus prevented from moving into an engaged position within device 10. Other arrangements to prevent this result are possible.

10 Referring now to Figure 2, there is shown syringe 30 in a disposed position retained within disposal device 10. In this case, a user of the disposal device 10 has press or interference fitted syringe 30 past the engaging means 20 into cavity 14a of barrel encapsulating portion 14. In particular, it will be seen that transversely extending flange portion 38a of barrel 38 has been pressed past
15 engaging means 20 to retain the syringe 30 within the disposal device 10.

Press or interference fitting is achieved in the following manner. The diameter of the transversely extending flange portion 38a of the syringe barrel 38 is slightly greater by a distance, x , than the diameter of opposed end 19 of syringe retention portion 16 as conveniently shown in Figure 3. Thus, as the user
20 presses syringe 30 through the retention portion 16, the outermost surface 38aa of the transversely extending flange 38a starts to interfere with an inner surface 17a of the wall 17 of retention portion 16 adjacent opposed end 19. Thus surfaces 38aa and 17a form one part of engaging means 20. Pressure exerted by the user causes the wall 17a to deform allowing the syringe 30 to be pressed
25 further into disposal device 10.

After press fitting, retraction of the syringe 30 by reasonable force is prevented by an annular engaging face 16a bearing on flange portions 38a. It will be noted that the syringe disposal device 10 has a slot 70 formed in its wall 14a proximate engaging face 16a, forming the remaining portion of engaging means
30 20, through which an outer portion of flange portion 38a extends in the engaged position. This slot 70 need not penetrate the external wall of retention portion but may be formed internally thereof, as shown by the dashed outline indicating a continuous external wall. The disposal device 10 may be designed such that

flange portion 38a seals the syringe barrel 38 encapsulating portion 14 and this minimises risk of harmful fluids coming into contact with a user of disposal device 10.

The disposal device 10 is conveniently manufactured from a rigid polymeric material. This is not to preclude fabrication from other materials, but use of a substantially rigid material of fabrication tends to promote efficacy of interference fitting and is preferred for use in this device 10. It is not intended that the engaging means 20, as formed by opposed end 19, wall portion 17a, engaging surface 16a and flange portion 38aa be substantially flexible as retraction of syringe 30 then becomes a real danger. The polymeric material must have sufficient stiffness to prevent puncture by needle 33. Polyamide polymers, such as nylons, may be most suitable for this application. One example of a nylon is that polymer sourced under the trade mark ZYTEL, a Registered Trade Mark of Dupont.

It is not necessary that it be the transversely extending flange portion 38a of the syringe 30 that passes the engaging surface 16a.

Another portion of the syringe 30 may alternatively or additionally be engaged and this may be necessary for syringes of other design. Further, other forms of engaging means may be contemplated by the present invention. For example, discrete lugs could be used rather than an annular engaging surface.

Otherwise, the transversely extending portion may be formed by a syringe barrel 38 outer surface or indeed any other appropriate surface of the syringe 30. It is contemplated that the disposal device 10 will be suitable for disposal of all conventional designs of syringe as, in this way, efficacy of disposal device 10 will be best promoted.

It will be observed that when syringe 30 is properly retained within the device 10, a lower end of the syringe barrel 38c, the needle carrier 35 and hub 34 are retained by light press fit within a morse taper 60 formed at the transition 42 between the syringe barrel encapsulating portion 14 and the needle encapsulating portion 12 as conveniently shown in Figure 4. Indeed, when the lower end 38c of the syringe barrel 38 comes into contact with morse taper 60, this will inform the intra-venous drug user that the syringe 30 is safely stored within disposal device 10. A clicking sound generated by passage of transversely

extending flange portion past sealing surface 16a and wall portion 17a at opposed end 19 of retention portion 16 provides further indication that the syringe 30 is safely stored out of harm's way.

The morse taper 60 may be designed in an effort to achieve needle 33 destruction as described in the Applicant's co-pending Australian Provisional Patent Application PQ6999, filed 18 April 2000, the contents of which are hereby incorporated by reference.

Another feature of the morse taper 60 will be observed. Because the lower end 38c of the syringe barrel 38 and needle 33 is safely sealed within morse taper 60, injectable fluids will not leak back where they may cause harm. It is to be noted that the needle encapsulating portion 12 must be formed of material sufficiently rigid to avoid any possibility of needle 33 puncturing it. If such puncture were possible, the efficacy of the disposal device 10 would be unacceptable. Polymeric materials may be selected to achieve this purpose as described above.

Referring now to Figure 7, the syringe disposal device 10 may conveniently be packed in an injection moulded holder 100, with a removable transparent or foil wrapper which may be printed with indicia about the device. Packaging equipment may be designed to effect this purpose. In such case, the wrapper must be sealed to the holder at sufficient pressure to maintain the seal, at least 20 kPa, more preferably 50 kPa or more. A reclosable lid could be provided. Holder 100 contains suitable items for an injection event in its thermo-formed or injection moulded base 110 which neatly accommodates syringe disposable device 10. Ordinarily, the holder 100 will not contain the injectable but this may be provided if desired and permitted. The holder 100 can further contain a spoon for mixing the injectable with distilled water prior to injection as well as filters and distilled water. The holder 100 may be packaged to be sterile prior to opening by the user and in this way, the injection event may be made as safe as possible. It is most advantageous that the holder 100 accommodate a single syringe 30 as it is most likely that this will be the preferred capacity of needle exchanges for legal reasons. In any event, construction of the device 10 in a simple inexpensive way makes it possible to minimise the cost of such single use holders 100.

Holders 100 may be disposed of as desired by the user but could be collected in a central disposal area. A condition of needle exchange may be return of the holders 100. In any event, if the device is properly used, the public health risks posed by the use of syringe 30 are much reduced.

5 Modifications and variations may be made to the present invention after reading of the disclosure by a skilled reader. Such modifications and variations are intended to form part of the present invention. For example, a cover may be provided for device 10 at its open end for purposes of sterility. The barrel encapsulating and needle encapsulating portions may be integrated into one
10 portion.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A syringe disposal device suitable for disposal of a single syringe having a needle, a barrel, a plunger and, on the barrel or plunger, a transversely extending portion, the disposal device including;

- a.) a needle encapsulating portion;
- b.) a syringe barrel encapsulating portion; and
- c.) a syringe retention portion,

wherein said syringe retention portion has an open end for insertion of a syringe therein and an opposed end communicating said retention portion with said syringe barrel encapsulating portion, engagement means being provided at or proximate, said opposed end of said syringe retention portion for retaining a syringe within the disposal device after passage of said transversely extending portion past said engagement means by interference fit.

2. The syringe disposal device according to claim 1 wherein the syringe retention portion is tapered and has greater external dimension along substantially its whole length than an outer diameter of the syringe barrel encapsulating portion and the needle encapsulating portion.

3. The syringe disposal device according to claim 1 or 2 including a morse taper at the transition between said syringe barrel encapsulating portion and said needle encapsulating portion.

4. The syringe disposal device of any one of the preceding claims wherein said engagement means is a lug engagement means for engaging said transversely extending portion after passage thereof past said lug engagement means.

5. The syringe disposal device of any one of claims 1 to 3 wherein said engagement means is an annular engaging face provided at said opposed end of said syringe retention portion.

6. The syringe disposal device of any one of claims 1 to 5 in which a body of said device is of tapered form.
7. A kit including a holder for retaining a syringe disposal device as claimed in any one of the preceding claims; and said syringe disposal device.
8. The kit of claim 7 including accessories for use in an injection. .

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)


PCT

(10) International Publication Number
WO 01/23019 A1

- (51) International Patent Classification⁷: A61M 5/00 (74) Agent: WATERMARK PATENT & TRADEMARK ATTORNEYS; 4th Fl, "Durack Centre", 263 Adelaide Terrace, Perth, W.A. 6000 (AU).
- (21) International Application Number: PCT/AU00/01204
- (22) International Filing Date: 2 October 2000 (02.10.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PQ 3204 30 September 1999 (30.09.1999) AU
- (71) Applicant (for all designated States except US): BASKE PTY LTD. [AU/AU]; 2/47 Liverpool Street, Rose Bay, NSW 2029 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HERBERT, John [AU/AU]; 6 Robina Street, St. Ives, NSW 2075 (AU).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYRINGE DISPOSAL DEVICE

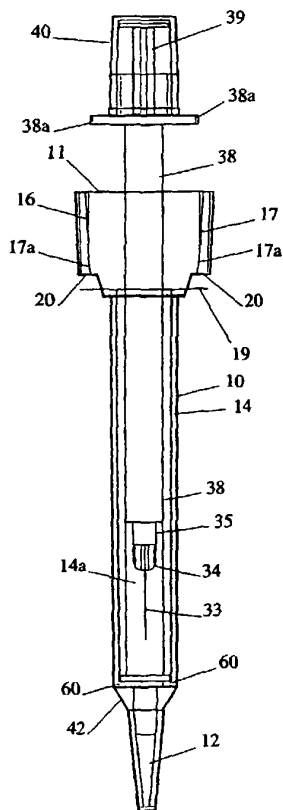

(57) Abstract: Disclosed is a syringe disposal device (10) suitable for disposal of a single syringe. The device is suitable for disposal of syringes (30) having a needle (33), a barrel (38), a plunger (39) and on the barrel (38) or plunger (39), a transversely extending flange portion (38a). The disposal device (10) may include a needle encapsulating portion (12), a syringe barrel encapsulating portion (14) and a syringe retention portion (16). The syringe retention portion (16) has an open end (18) to allow syringe (30) to be inserted into device (10). The opposed end (19) of syringe retention portion (16) communicates the retention portion (16) with syringe barrel encapsulating portion (14). Engagement means (20) are provided at, or proximate, the opposed end (19) of the syringe retention portion (16) for retaining syringe (30) within the disposed device (10) after passage of the transversely extending flange (38a) past the engagement means (20) by interference fit. The disposal device (10) is advantageously of tapered form.

WO 01/23019 A1

1/7

Fig. 1

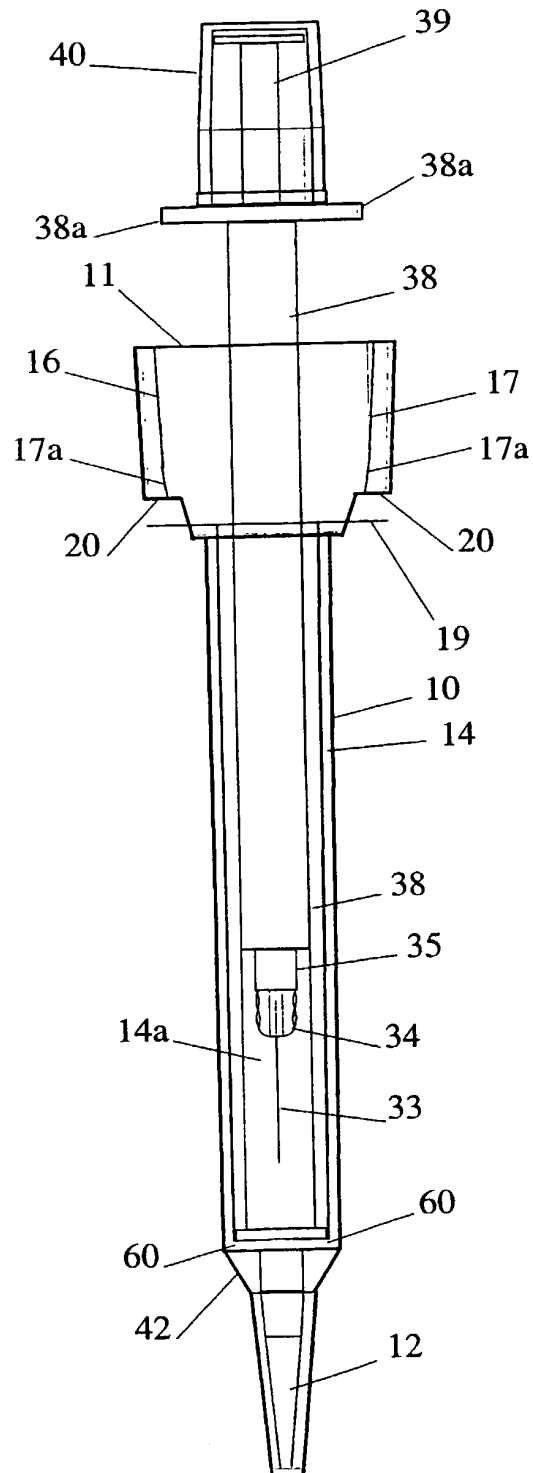


Fig. 2



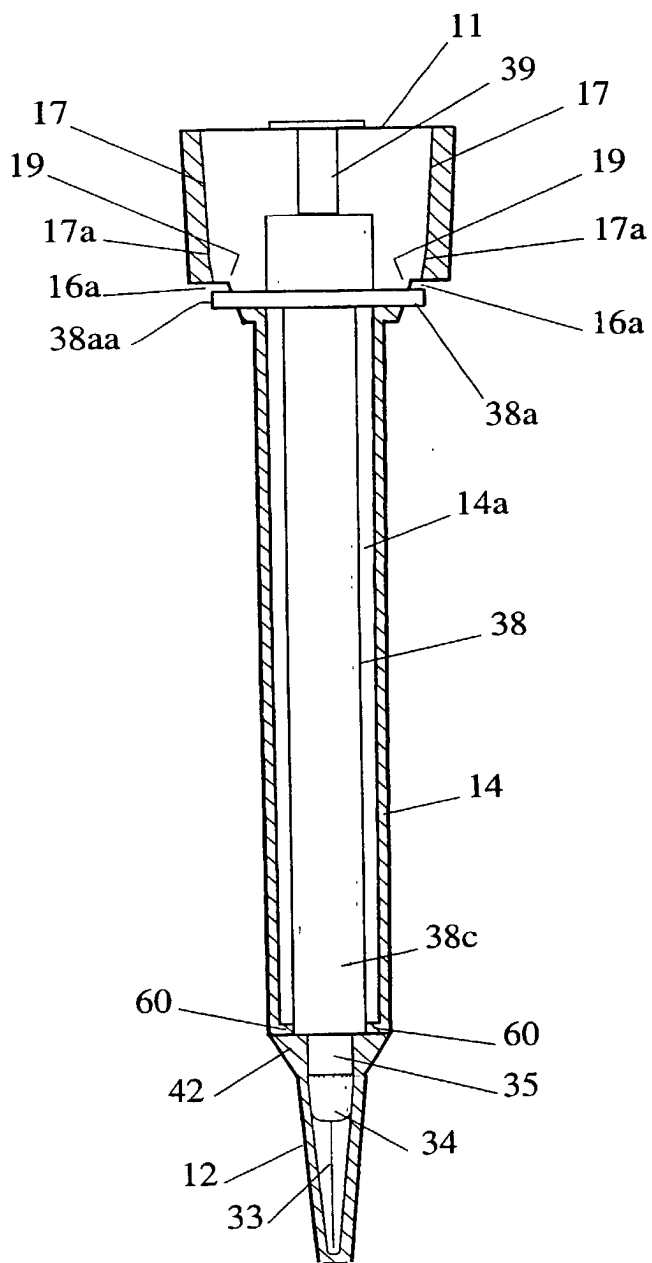


Fig. 3

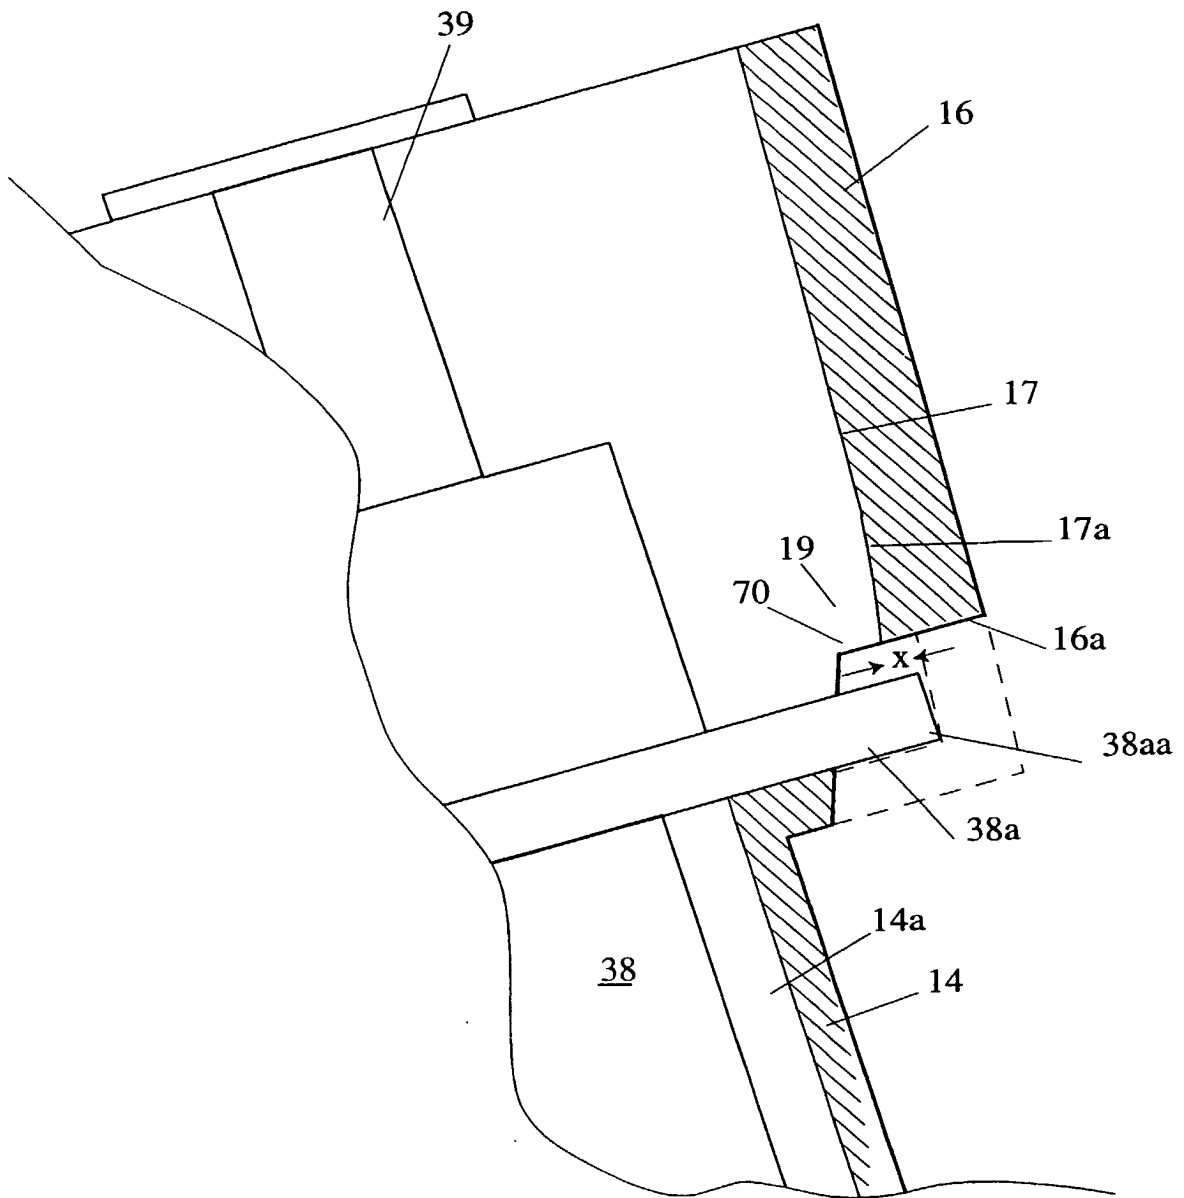

4/7

Fig. 4

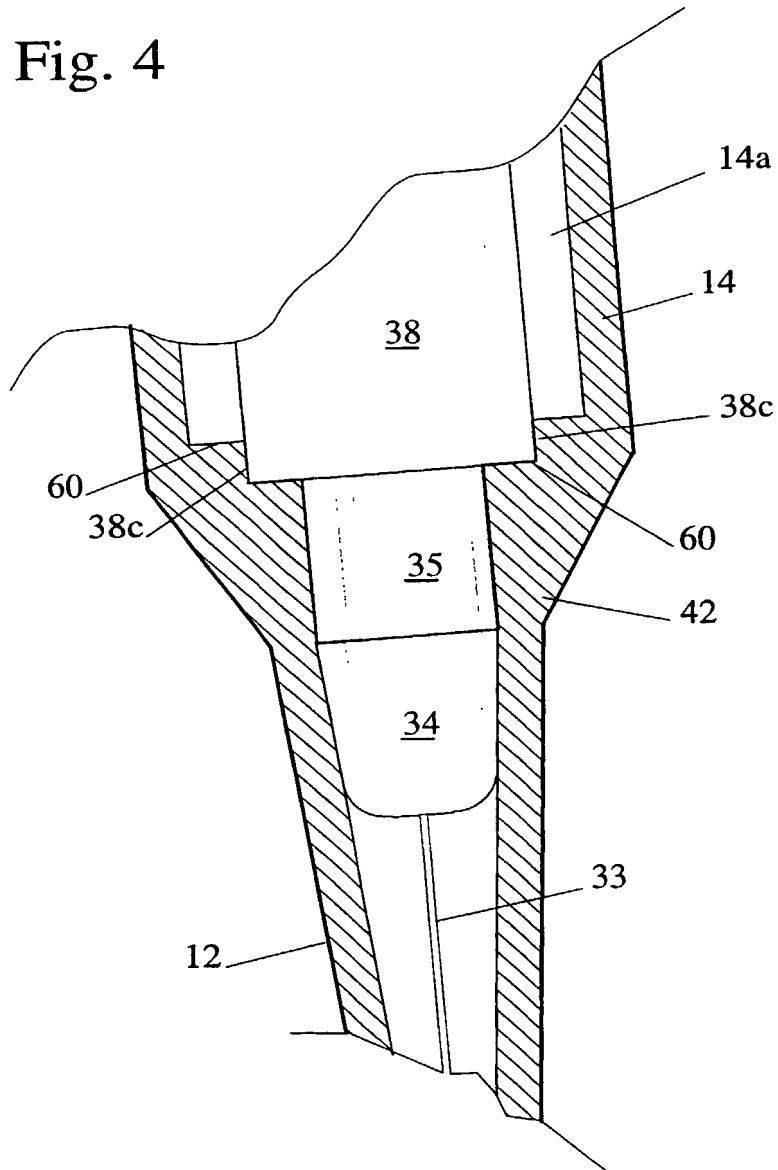

5/7

Fig. 5



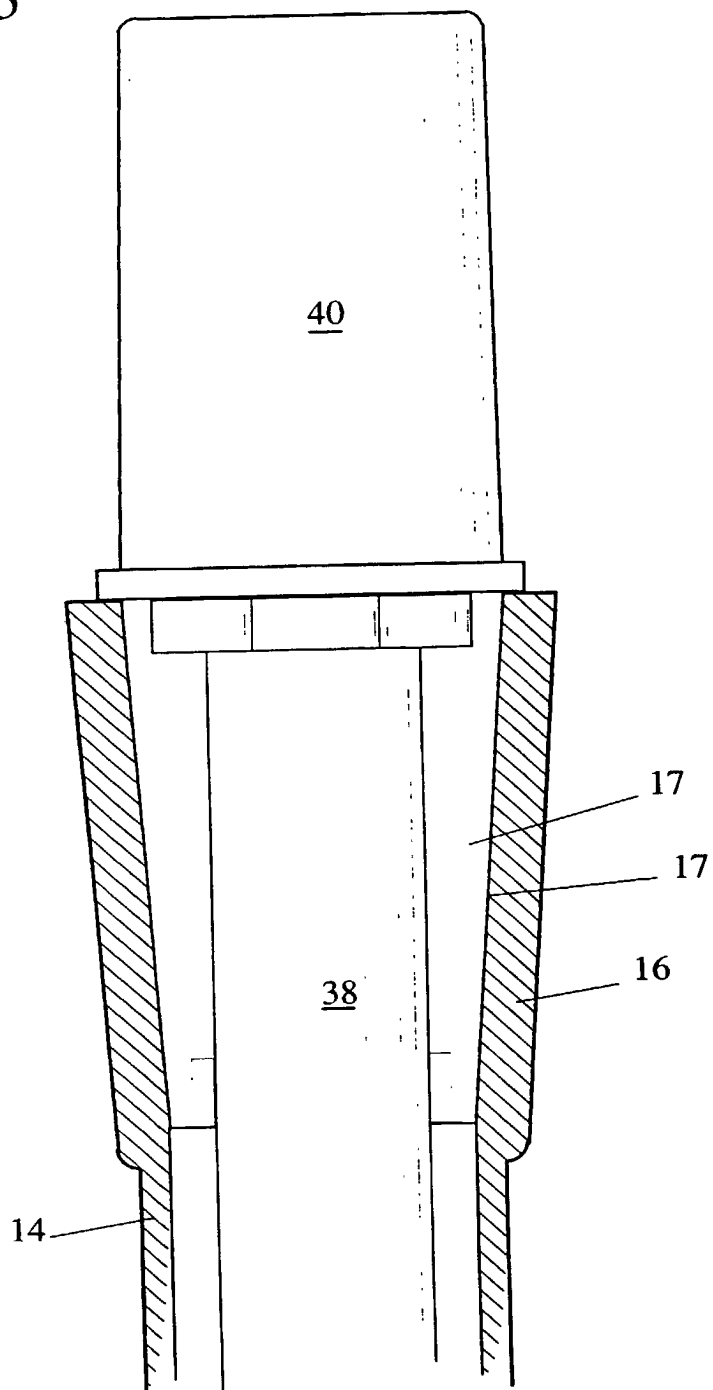



Fig. 6

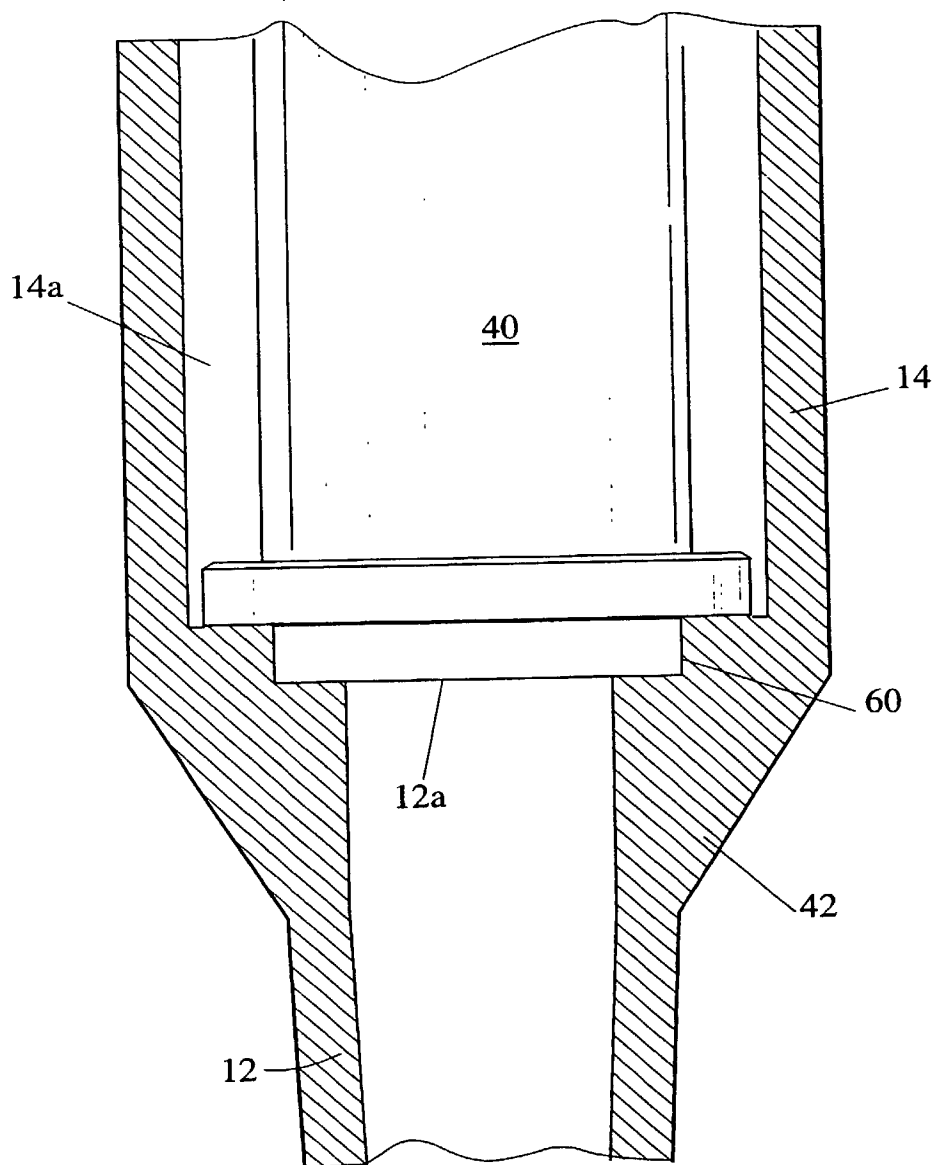

7/7

Fig. 7

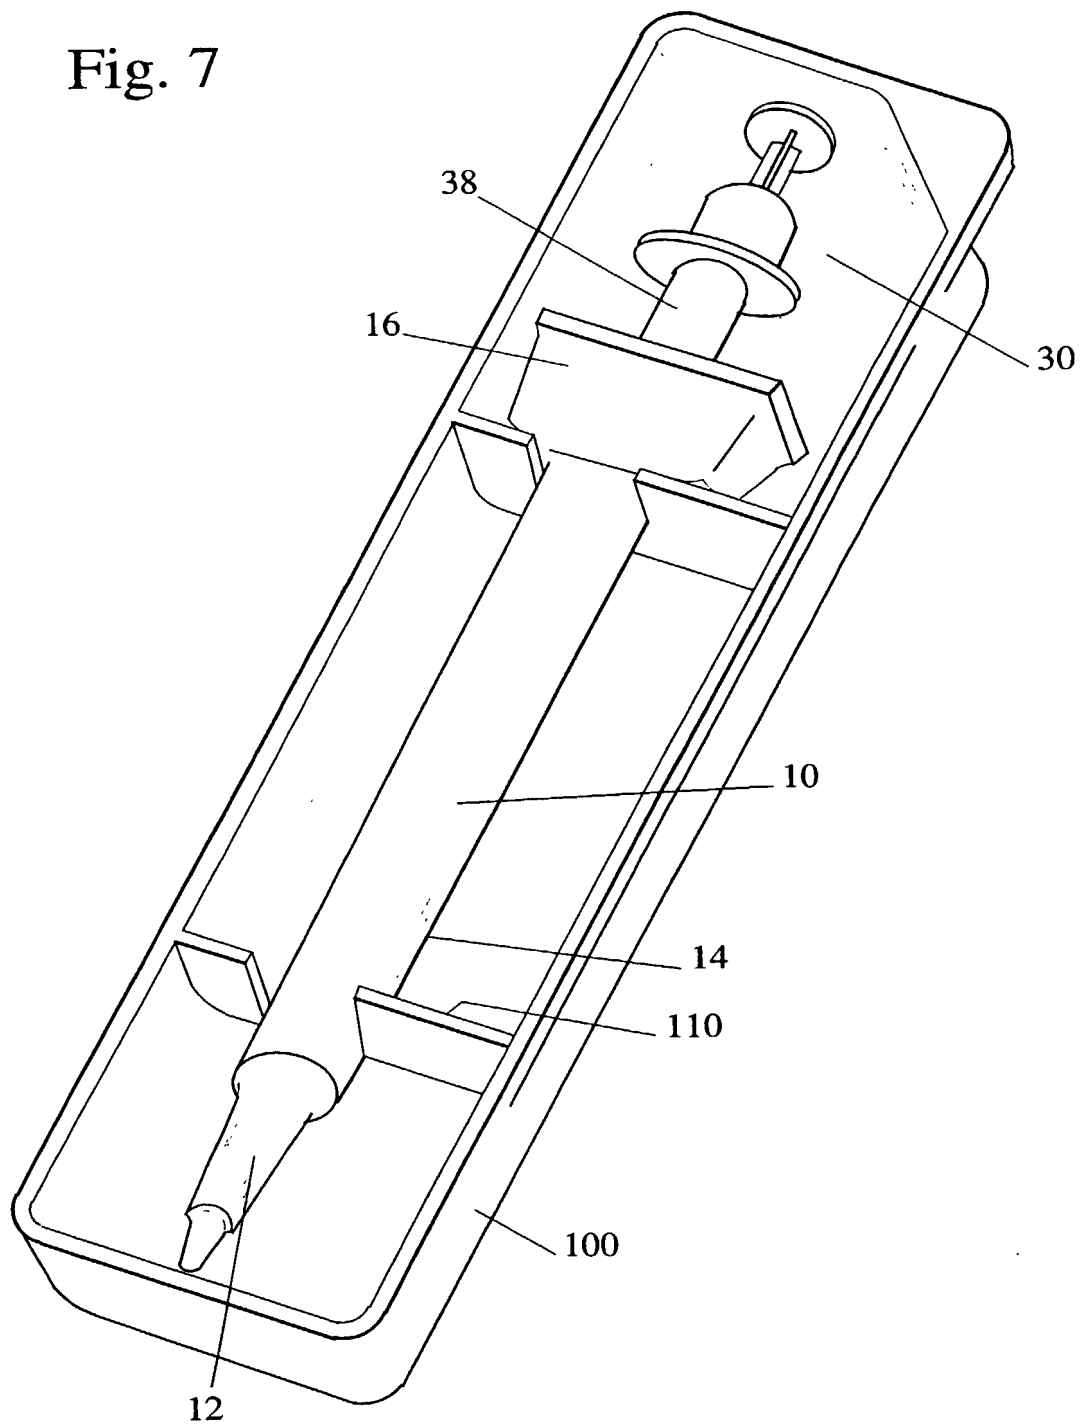



PTO/SB/01 (6-95)
Approved for use through 10/31/98 OMB 0651-0032

Type a plus sign (+) inside this box → ☐

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DO/PTO
Rev. 6/95

U.S. Department of Commerce
Patent and Trademark Office

Attorney Docket Number

1037BAS-1

First Named Inventor

HERBERT, John

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION

COMPLETE IF KNOWN

Application Number

10/089,398

Filing Date

Group Art Unit

Examiner Name



Declaration
Submitted with
Initial Filing

OR



Declaration
Submitted after
Initial Filing

As below named inventor, I hereby declare that::

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed for which a patent is sought on the invention entitled:

"SYRINGE DISPOSAL DEVICE"

(Title of the Invention)

the specification of which



is attached hereto

OR



was filed on
(MM/DD/YYYY)

02 October 2000

as United States Application Number or PCT International

Application Number

PCT/AU00/01204

and was amended on
(MM/DD/YYYY)

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 (a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any Pct international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				Yes	No
PQ 3204	Australia	September 30, 1999	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto.

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)		
		<input type="checkbox"/>	Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Burden Hour Statement: This form is estimated to take .4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents Washington, DC 20231

Type a plus sign (+) inside this box ☐

DECLARATION

Page 2

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States of PCT international application in the manner provided by the first paragraph of Title 35, United States Code § 112 1 acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto.

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☒ Firm Name OR SHERIDAN ROSS P.C. Customer Number or label 22442

☐ List attorney(s) and/or agent(s) name and registration number below:

Name	Registration Number	Name	Registration Number
ZINGER, DAVID F.	29,127	HANSEN, LEWIS D.	35,538
GROSETH, CRAIG	31,713	KOVARIK, JOSEPH E.	33,005
BLAKELY, TODD P.	31,328	SWARTZ, DOUGLAS W.	37,739
CONNELL, GARY J.	32,020	KUGLER, BRUCE A.	38,942
CROOK, WANNELUM.	31,071	BRUNELLI, ROBERT R.	39,617
STAVISH, SABRINA CROWLEY	33,374	JOHNSON, Brent P.	35,031

☒ Additional attorney(s) and/or agent(s) named on a supplemental sheet attached hereto

Please direct all correspondence to: ☐ Customer Number or label OR ☐ Fill in correspondence address below

Name
Address 1560 BROADWAY, SUITE 1200
Address
City DENVER State COLORADO Zip 80202-5141
Country UNITED STATES OF AMERICA Telephone (303) 863-9700 Fax (303) 863-0223

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name John Middle Initial Herbert Family Name Herbert Suffix e.g. Jr.

Inventor's Signature [Signature] Date X 31/5/2002

Residence City St. Ives State N.S.W. AU Country AU Citizenship AU


Post Office Address 6 Robina Street, St. Ives. 2075. Australia

Post Office Address

City St. Ives State N.S.W. Zip 2075 Country AU Applicant Authority

☐ Additional inventors are being named on supplemental sheet(s) attached hereto.

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

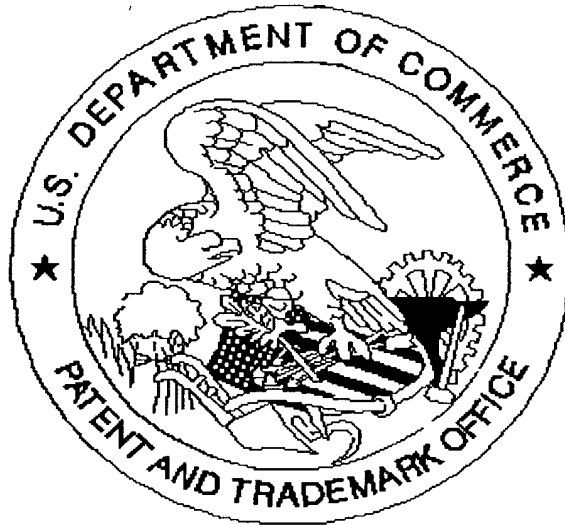

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☞ *Scanned copy is best available. page 2 of Declaration has
black line*